



Nebula Weighing Indicator

For Universal Weighing



Features

- Light and Compact indicator
- Cabinets available in ABS and SS304
- Display variants available in LED & LCD
- Functions - Weighing, Piece Counting, Check weighing, Check Counting, Accumulation, Peak Hold
- LCD with colour changing feature
- 9 locations for check weighing and 9 locations for check counting
- C type USB charging port with 5 V 2.4 A power adapter
- Lithium Ion Battery
- RS232
- Bluetooth & RTC (optional)



Nebula Indicators with U bend and Pole Mounting Bracket




Inside View

Perfect choice for weighing....

Technical Specifications

Cabinet	Stainless Steel 304 / ABS
Display	LED / LCD
ADC Type	24 Bit Sigma Delta
Minimum input voltage	< 1 mV
Minimum input sensitivity	0.1 μ V per interval
Analogue input range	0 mV to 15 mV
Loadcells	Upto 6 loadcells 350 Ω - 4 wire technique
Calibration	Using Keys, Calibration in kilograms
Measurement Units	kg, g, lb
Keypad	Mechanical Keys, 5 Nos.
Display Size	20 mm digit height
Functions	Weighing, Piece Counting, Check Weighing, Check Counting, Accumulation, Peak Hold
Communication Interface	RS232, TTL
LCD Display Colours	White, Red, Green, Yellow, Blue
Operating Temperature	0°C to 50°C
Power Supply	110 V AC to 240 V AC 50 Hz/60Hz through adapter or 5 V 2.4 A through USB C
Battery	7.4 V 2600 mAh Lithium Ion
Mounting Type	Table Mount, Wall Mount, Pole Mount
Net Weight (with Battery)	1.6 kg approx.

Physical Dimension

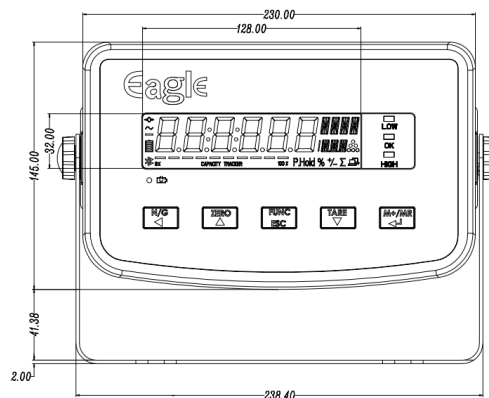

* All dimensions in mm

DEEPAK ELECTRONICS

Near Garhi Railway Station, Sadhrana road,
Garhi Harsaru, Gurugram, Haryana-122505
Email : deepakelectronics320@gmail.com
Website : www.deepakelectronics.com

Contact No. :

Sales - 9717099170, 9718298952

Service - 9212559709, 9971563553